Document Number:	FSW-TGE-RLPM-02
Revision Number:	1
Effective Date:	10-01-2024
Function:	RTX TE - Tech & Glbl Engineering
Authorized By:	Corporate Vice President - Global Engineering and Program Management

Functional Standard Work

Hard Copies Uncontrolled – Verify Effective Date Prior to Use

Title: RLPM Development

Table of Contents

1. Purpose
2. Persons Responsible
3. Responsibilities
4. Process Or Procedure
5. Revision History
6. Related Information
7. Exhibits
8. Change Management

1 Purpose

1.1 The purpose of this standard work is to provide additional Development Phase requirements and details for compliance with GCP-59, RTX Lifecycle Program Management (RLPM).

2 Persons Responsible

2.1 Scope

2.1.1 The "Development" Phase (Figure 1) intent is activity related to definition and management of:

a. Requirements and architecture.

b. Preliminary and detailed design.

c. Implementation and integration of component, product and system product levels.

d. Verification, validation, certification and/or qualification.

e. Supply Chain planning and execution.

f. Manufacturing readiness and preparation for transition to production.

g. Sustainment/Customer Support readiness.

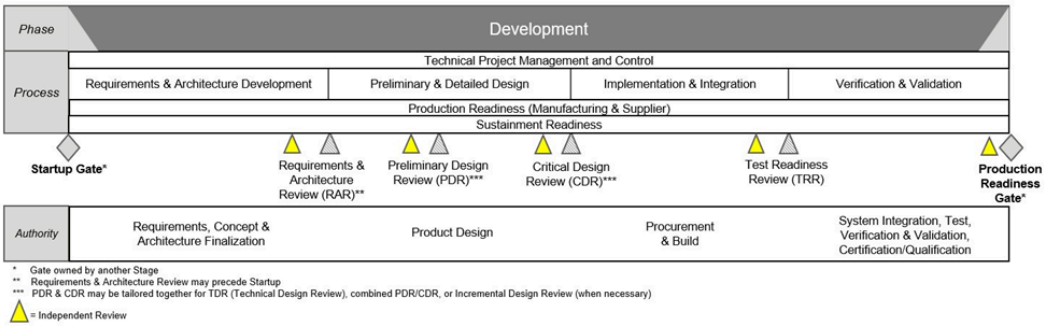

Figure 1: Development Phase Framework

2.1.2 Gates and Milestone Reviews Determination

a. No RTX-required Gates within the Development Phase

i. Startup Gate precedes Development Phase

ii. Production Readiness Gate follows Development Phase and is typically post-certification/qualification activity

b. Milestone Reviews during the Development Phase

i. Requirements and Architecture Review (RAR)

ii. Preliminary Design Review (PDR)

iii. Critical Design Review (CDR)

iv. Test Readiness Review (TRR)

c. Milestone Reviews are mandatory.

i. A Program may include multiple of each review based on Program complexity.

ii. A Program may by compliant by using agile execution iterative events that meet the intent of the Milestone Reviews.

iii. The timing of Milestone Reviews is not prescribed within the Development Phase.

1. Different development models between Businesses could start as early as Pursuit-to-Startup with formal RARs.

2.2 Applicability

2.2.1 This standard work applies to all:

a. Organizations within RTX, including its major Business segments (each, a “Business”), divisions, and direct and indirect subsidiaries;

b. Majority-owned or controlled joint ventures and other majority-owned or controlled entities and operations; and

c. Directors, officers, employees, contractors, and any other persons who work for these organizations.

2.2.2 Each Business must implement the provision of this standard work within 6 months following the initial effective date. “Implement” in this context means the Business specific program lifecycle management policies are updated and released in compliance to RLPM.

2.2.3 This standard work applies throughout the RLPM Development Phase. See Exhibit A of GCP-59.

2.3 Persons Affected

2.3.1 This standard work applies to all stakeholders listed in the Responsible, Accountable, Support, and Inform (RASI) Matrix. See Exhibit A.

2.4 Governance

2.4.1 See FSW-TGE-0, Governance of Technology & Global Engineering Documents for governance of this FSW.

3 Responsibilities

3.1 The responsibility assignment matrix inclusive of Responsible, Accountable, Support, and Inform represents responsibilities for activities. For successful Lifecycle Program Management, each RTX function plays a role in meeting a requirement. See Exhibit A for the RASI that represents functional assignment recommendations.

3.2 In some cases, individuals within certain functions may perform multiple roles.

4 Process Or Procedure

4.1 Requirements

4.1.1 Key Processes Associated with Development

a. For Technical Project Management and Control process, Engineering with support of the Program Management Team (PMT),

i. Matures the Development Plan created during Pursuit-to-Startup.

ii. Assesses the program execution to the approved Development Plan and continually assesses technical risk (burn down of identified risks and assessment of new risks)

across the design and development life cycle.

b. For Requirements and Architecture Development process, Engineering, with support of the PMT, captures customer/stakeholder requirements and defines an architectural concept to satisfy the requirements.

c. For Preliminary and Detailed Design process, Engineering with support of the PMT,

   i. Matures a compliant product/system architecture and requirements into detailed plans for implementation.

   ii. Ensures the product is safe, viable, cost-effective and can be completed within the desired time and budget.

d. For Implementation and Integration process, Engineering with support of the PMT, turns the detailed design into a fully functional product or system by developing and integrating product elements together to mitigate risk.

e. For Verification and Validation process, Engineering with support of the PMT, verifies that the product implementation meets its requirements and satisfies the user needs.

f. For Production Readiness (Manufacturing) process Operations with support of the PMT, transforms the detailed designs and prototypes into integration-ready products at scale.

g. For Production Readiness (Supplier) process, Supply Chain with the support of the PMT,

   i. Secures reliable sources for all materials required for manufacturing or product integration.

   ii. Evaluates suppliers for cost, quality, and reliability.

h. For Sustainment Readiness process, Aftermarket/Customer Support with support of PMT, verifies that the sustainment readiness meets its requirements and satisfies the user needs.

4.1.2 Phase Entrance Criteria must include:

a. A baselined Program Plan.

b. An updated risk register from the Startup Gate.

c. A baselined Development Plan that defines the technical execution strategy and key plans that support the Development Phase and necessary reviews.

d. Assessment and confirmation of staffing resources to meet the Development Plan. (for example, availability, quantity and skill)

e. The Program should have an achieved Technology Readiness Level (TRL) and Manufacturing Readiness Level (MRL) required by contract and/or TRL and MRL 6, whichever is greater. If this is not achievable,

   i. There must be a proposed TRL/MRL maturation plan for achieving TRL 6 by PDR and MRL 6 by CDR.

   ii. Funding of the TRL and MRL maturation plan must occur and include back up plans if unable to achieve the proposed TRL/MRL 6.

   iii. The back up plans must meet both the Program and Business objectives.

f. An approved architectural concept(s) baseline. NOTE: The Business should further define architectural concept baseline and approvals.

g. A system level product cost model, Design to Unit Production Costs (DTUPC) or Design to Cost (DTC) targets.

h. Performance of Design Risk Analysis [Design Failure Mode and Effects Analysis (DFMEA) including suppliers, Key Characteristics (KC) and Critical Items (CI) identified] when contractually required or as determined by the Business.

i. Confirmation of dependencies with necessary updates to program cost, schedule, and risk posture. Example dependencies include Independent Research and Development (IRAD), Contract Research and Development (CRAD), or reuse assumptions such as program lift or obsolescence.

j. Preliminary Verification and Validation (V&V) plan with methods identified for system requirements.

k. A baselined sourcing strategy.

l. A baselined Sustainment Plan.

m. A baselined quality plan.

n. A baselined product safety plan.

o. A baselined Intellectual Property (IP) plan.

p. A baselined Global Trade export/import plan, if required.

q. Identified and documented regulatory and certification requirements.

r. An initial assessment of facility, site, and infrastructure plans and requirements.

s. An approved capital investment plan.

t. An internal initial production capacity plan and/or factory model with a plan to review maturity during technical reviews, including manufacturing automation plans.

4.1.3 Phase Exit Criteria must include:

a. Achievement of all contractual requirements for the Development Phase.

b. Completion of reviews per the Development Plan with actions closed.

c. Successful implementation and integration of components, products, and system level products.

d. Successful completion of V&V of component, product, and system level requirements with customer approval documented.

e. Achievement of certification and qualification requirements.

f. Achievement of TRL required by contract and/or the Business, whichever is greater (for example, the assumption is TRL 8 upon exiting the Development Phase).

g. Achievement of MRL required by contract and/or the Business, whichever is greater (for example, the assumption is MRL 8 upon exiting the Development Phase).

h. Formal release and configuration control of the technical data package for the relevant components, products and systems. May also include configuration control of other associated technical product data.

i. Formal documentation of non-compliances for both internal and external requirements and remaining open actions/gaps to the approved Development Plan with a clearly defined time-bound, resourced, and funded closure plan.

j. Successful completion of proof of design/proof of manufacturing with lessons learned incorporated into design or manufacturing documentation and flowed down to suppliers for future builds.

k. Released design documentation under configuration management control at the appropriate release level.

l. Documentation, through Legal/Contracts/Compliance, of IP developed on the Program, including sustainment IP strategies.

m. A Global Trade review conducted and update export/import plan, if required.

n. Conversion of the engineering BOM (eBOM) into manufacturing BOM (mBOM).

o. Released production BOM and production sources identified for all parts with approved rate plans.

p. An achieved or approved Program production unit cost with cost reduction plan established and funded.

q. A funded plan to develop and release sustainment documentation from the Development phase, ensuring it is under configuration management at the appropriate release level.

NOTE: The Supplemental Review, Service Readiness Review, for production, post-production sustainment, and certification readiness should occur.

NOTE: The Program design documentation should include systems and subsystem requirements, concept of operations, system architecture, technical data package, test, certification and qualification reports.

4.1.4 Milestone Reviews

a. Review Attendance. The Program and Development Plans must define who needs to attend reviews.

b. Approval Requirements for Milestone Reviews

   i. Required Approvals: Program Manager, Engineering Lead, and Operations Lead (may include Supply Chain responsibility)

   ii. Recommended Approvals: Quality Lead and Safety Lead

   iii. Additional Approvals: As defined in the Program Plan, Development Plan, and Business defined Delegation of Authority (DOA)

c. RAR

   i. Description: Intended to review the requirements and architecture to ensure it meets customer needs at the appropriate level of maturity. Examples of RARs may include system architecture concept freeze, system requirements review, system functional review, stakeholder requirements, or backlog refinement.

   ii. During this review the Program Management Team (PMT)

      1. Formally confirms with the customer that translation of contract/user requirements into system specific technical requirements is correct.

2. Verifies those requirements are reflected in the system concept architecture approach.
3. Identifies critical technologies.
4. Plans required technology demonstrations.
5. Documents risks and appropriate mitigation plans.
6. Documents decisions, actions, measures, and lessons learned.

iii. Entrance Criteria for the RAR

1. Mandatory
   a. A defined list of artifacts for assessment with acceptability criteria.
   b. Requirements management process defined.
   c. System-level requirements defined.
   d. System architecture defined.
   e. System interfaces identified.
   f. An achieved TRL aligned with TRL maturation plan.
   g. An achieved MRL aligned with MRL maturation plan.
   h. Preliminary safety assessment of requirements with identification of safety critical requirements.
   i. Initial assessment of risk and opportunities documented and understood with risk mitigation plans or opportunity capture strategies.
   j. Review of any requirements dependencies (IRAD, CRAD, reuse strategy).
   k. Confirmation that capital requirements are on plan including, but not limited to, any site, facility or infrastructure needs.
   l. Assessment and confirmation of staffing resources and availability to meet preliminary and detailed design such as quantity and skillset.
   m. Assessment of status against Key Performance Indicators (KPIs) identified by the program and documented risks of meeting KPI targets.
2. Recommendations
   a. A requirements database established
   b. A test architecture (with Integration, Verification, and Validation (IV&V) approaches) with clear milestones to enable customer approval and system acceptance
   c. A baselined set of requirements and a Verification Cross Reference Matrix (VCRM) or requirements compliance matrix that shows the method of verification planned for each requirement.
   d. Product and component decomposition completed (requirements, cost, functional and physical partitioning, interfaces)
   e. Production/Manufacturing requirements assessment for manufacturing
   f. Support (Maintenance) requirements assessment for maintenance and support/servicing

g. DTC, DTUPC, or Unit Production Cost (UPC) baseline and cost targets updated

h. Completed concept Modeling, Simulation and Analysis

i. Completed concept trade studies

j. Completed Commercial Off the Shelf (COTS) and Government Off the Shelf (GOTS) assessments

k. Technical complexity assessment updated

l. Maintenance, Repair and Overhaul (MR&O) Strategy assessed prior to starting design (strategy or plan prior to RAR or prior to PDR)

m. A released Digital Plan (Digital Product Lifecycle (DPLC), Digital Thread, Digital Twin, Digital Engineering, and/or Model-based System Enterprise (MBSE)

n. An assessment, with cost and schedule impact, of any Technical Debt (specifically related to reuse) with documented strategy for closure (for example, a burndown plan or customer negotiation strategy)

o. Assessment and update of the Sustainment Plan

p. Assessment and update of the Production Plan

q. Assessment and update of the sourcing strategy

r. Assessment and update of the Production Capacity/Factory Models

iv. Exit Criteria for the RAR

1. Each of the artifacts for assessment must meet all its acceptability criteria, or have a corrective action plan documenting the corrective actions required to achieve acceptability.
2. The PMT must ensure documentation of outcomes of the review including decisions, actions from the review with expected closure dates, risks and opportunities with mitigation plans and capture strategies, and lessons learned.
3. The PMT must ensure capture of required approvals.

d. PDR

i. Description: Intended to review the design to ensure it meets customer needs at the appropriate level of maturity. Combination of a PDR and CDR may occur as a Technical Design Review or substitution as an Incremental Design Review for some agile programs.

ii. During this review the PMT

1. Reviews system, product, and component preliminary and detailed design and build readiness maturity with the Customer including preliminary design baseline updates and team readiness (including teammates and suppliers) to execute the build and integration plan with acceptable risk.
2. Documents decisions, actions, measures, risks and lessons learned.
3. At PDR, assesses the system architecture and preliminary design approach (high level concepts and architecture) against the development plan to make sure the allocated baseline (hardware and software) meets the requirements and is mature enough to proceed with detailed design.

iii. Entrance Criteria for the PDR

NOTE: The mandatory entrance criteria may not be complete until the final design review.

1. Mandatory
    a. A defined list of artifacts for assessment with acceptability criteria
    b. Review of all actions from prior system reviews for closure readiness (for example, RAR)
    c. Allocated requirements to product baselines
    d. An assessment of the design that confirms it meets the customer requirements with reasonable evidence (for example, Model and Simulation (M&S), Sim-To, prototyping, or historical).
    e. An assessment of the design that confirms all requirements can be verified and validated or identified for further negotiation with the Customer position on "deviations" from the requirement(s).
    f. An assessment of the design by appropriate stakeholders that confirms it is producible (quality and at rate, make and buy)
    g. Confirmation of any dependencies (for example, IRAD, CRAD, re-use strategy)
    h. An achieved TRL aligned with TRL maturation plan
    i. An achieved MRL aligned with MRL maturation plan
    j. Execution of the TRL backup plan if TRL not achieved per the maturation plan.
    k. An initial Design Risk Analysis (for example, DFMEA) completed at PDR on program identified Critical Items (including suppliers)
    l. Status of any changes to V&V methods approved for all product and system requirements with customer agreement documented
    m. Assessment and update of test, verification, validation and/or commercial certification or military qualification plans.
    n. Assessment and review of test plans to confirm necessary test equipment and test environment readiness for manufacturing and test.
    o. Confirmation that capital, site, facility, infrastructure, equipment, and capacity meet program requirements, with appropriate funding and planning or have mitigation plans in place.
    p. Documented risk and opportunities with risk mitigation plans or opportunity capture strategies
    q. Assessment and confirmation of staffing resources and availability to meet implementation plan (for example, quantity and skillset)
    r. Assessment and update of sourcing strategy with mitigation plans in place
    s. Assessment status against KPIs identified by the program and documented risks of meeting KPI targets

t. Assessment and confirmation that the production plan is on track to support production or has mitigation plans in place.

u. Assessment and update of production capacity and factory models

2. Recommendations

a. Document technical debt, manufacturing debt and risks and opportunity (such as impact to quality, safety, production, sustainment, product re-use) with strategy for closure (such as burndown plan, or customer negotiation strategy) that includes funding and schedule commitments

b. Update to DTC, DTUPC, or UPC baseline and cost targets

iv. Exit Criteria for the PDR

1. Each of the artifacts for assessment must meet all its acceptability criteria, or have a corrective action plan documenting the corrective actions required to achieve acceptability

2. The Program Manager must have documented outcomes of the review including decisions, actions from the review with expected closure date, risks and opportunities with mitigation plans and capture strategies, and lessons learned.

3. The Program Manager must ensure capture of required approvals.

e. CDR

i. Description: Intended to review the design to ensure it meets customer needs at the appropriate level of maturity. PDR and CDR may be combined as a Technical Design Review or substituted as an Incremental Design Review for some agile programs.

ii. At CDR, assesses the detailed design (detailed and specific design elements) against the development plan to confirm it meets all specified requirements and is ready for implementation and manufacturing test articles.

iii. Entrance Criteria for the CDR

NOTE: The mandatory entrance criteria may not be complete until the final design review.

1. Mandatory

a. A defined list of artifacts for assessment with acceptability criteria

b. Reviewed all actions from prior system reviews for closure readiness (for example, RAR and PDR)

c. An assessment of the design that confirms it meets the customer requirements with reasonable evidence (for example, M&S, Sim-To, Prototyping, or historical).

d. An assessment of the design that confirms requirements can be verified and validated or identified for further negotiation with the customer.

e. An assessment of the design by appropriate stakeholders that confirms it is producible (quality and at rate, make and buy)

f. Confirmation of any dependencies (for example, IRAD, CRAD, re-use strategy)

g. An achieved TRL aligned with TRL maturation plan

h. An achieved MRL aligned with MRL maturation plan

i. Execution of the MRL backup plan if MRL not achieved per the maturation plan.

j. An updated Design Risk Analysis (for example, DFMEA) completed on program identified Critical Items (including suppliers)

k. Status of any changes to V&V methods approved for all product and system requirements with customer agreement documented

l. Assessment and update of test, verification, validation and/or commercial certification or military qualification plans.

m. Assessment and review of test plans to confirm existence of necessary test equipment and test environment for manufacturing and test.

n. Confirmation that capital, site, facility, infrastructure, equipment, and capacity meet program requirements, with appropriate funding and planning or have mitigation plans in place.

o. Documented risk and opportunities with risk mitigation plans or opportunity capture strategies

p. Assessment and confirmation of staffing resources and availability to meet implementation plan (for example, quantity and skillset)

q. Assessment and update of sourcing strategy with mitigation plans in place

r. Assessment status against KPIs identified by the program and documented risks of meeting KPI targets

s. Assessment and confirmation that the production plan is on track to support production or has mitigation plans in place.

t. Assessment and update of production capacity and factory models

u. Review of the criteria for the Pre-Production Readiness Review with confirmed inputs required to support the review available following the CDR.

v. Assessment and update of the Sustainment Plan to align with detailed design at CDR.

2. Recommendations

a. Document technical debt, manufacturing debt and risks and opportunity (such as impact to quality, safety, production, sustainment, product re-use) with strategy for closure (such as burn down plan, or customer negotiation strategy) that includes funding and schedule commitments

b. Update to DTC, DTUPC, or UPC baseline and cost targets

iv. Exit Criteria for the CDR

1. Each of the artifacts for assessment must meet all its acceptability criteria, or have a corrective action plan documenting the corrective actions required to achieve acceptability

2. The Program Manager must have documented outcomes of the review including decisions, actions from the review with expected closure date, risks and opportunities with mitigation plans and capture strategies, and lessons learned.
3. The Program Manager must ensure capture of required approvals.

f. TRR

i. Description: Conduct of TRRs can be for integration, test, verification, or validation as well as specific critical test events.

ii. During this review the PMT

1. Reviews product and/or system maturity
2. Reviews test readiness internally or with the customer. Typically, this includes product and/or system build and test history, test planning maturity, test team readiness and resource availability, and user readiness to support or conduct testing.
3. Documents decisions, actions, measures, risks and lessons learned.

iii. Entrance Criteria for the TRR

1. Mandatory

a. A defined list of artifacts for assessment with an acceptability criteria

b. Review of all actions from prior system reviews for closure readiness (RAR, PDR, and CDR)

c. Verification and validation methods approved for all product and system requirements with customer agreement documented

d. Commercial Certification or Military Qualification test plan approved for all product and system requirements with customer agreement documented

e. Assessment and confirmation that all applicable test procedures for use in formal testing have been validated through dry runs or alternative methods

f. Assessment and confirmation that required Sites, Facility, Test Equipment, Factory Test Equipment, Test Assets, Infrastructure, Government and/or supplier furnished material are available to successfully execute engineering manufacturing and testing to support a V&V, Qualification, and Certification test campaign.

g. Assessment and confirmation that instrumentation and data collection meet the requirements needed to successfully execute testing.

h. Documented agreement between Program, Customer, and/or Regulatory Authority that the program meets criteria to enter formal testing.

i. A documentation of the pedigree of software/firmware configuration and as-designed/as-built hardware configuration for System/Product under test

j. Confirmation that the unit under test meets the requirements established to satisfy commercial certification or military qualification testing.

k. Conduct of a Safety Assessment for all products, test equipment, test event, or test facilities for testing or assessment and confirmation that Test

Plan(s) have Safety assessment requirements for completion prior to testing.

l. Assessment and confirmation that staffing resources are available to meet implementation plan (for example, quantity and skill)

m. Assessment of status against KPIs identified by the program and documented risks of meeting KPI targets

n. Assessment of the production plan with actions that will allow entry into the Production Readiness Gate

o. Assessment and update of Production Capacity/Factory Models

p. Assessment of the Sustainment Plan with actions that will allow entry into the Production Closure/Field Support Gate

2. Recommendations

a. Update DTC, DTUPC, or UPC baseline and cost targets

b. Assessment, with cost and schedule impact, of any technical debt with documented strategy for closure (for example, burn down plan or customer negotiation strategy)

iv. Exit Criteria for the TRR

1. Each of the artifacts for assessment must meet all its acceptability criteria, or have a corrective action plan documenting the corrective actions required to achieve acceptability

2. The Program Manager must have documented outcomes of the review including decisions, actions from the review with expected closure date, risks and opportunities with risk mitigation plans and opportunity capture strategies, and lessons learned.

3. The Program Manager must ensure capture of required approvals.

4.1.5 Per GCP-59, Businesses establish requirements and criteria for the conduct of Independent Reviews. See Figure 1 for the Independent Review (IR) Framework recommended for the gates and milestone reviews during development.

5 Revision History

5.1 Enter revision history details in table below. Information entered there is for example only and should be removed after drafting contents.

Rev #	Date	Content Owner	Author	Details
1.0	10.1.2024	M. Delcheccolo	C. Oban	Initial Release

6 Related Information

6.1 Definitions

6.1.1 See GCP-59 for definitions of additional terms used within this FSW.

6.1.2 Critical Item – A component, part, subsystem or function that has a significant impact on the overall performance, safety or reliability of the product or system being delivered.

6.1.3 Technical Debt – Defined as choosing an easier and quick solution to meet functional need instead of a proper and more robust approach that would take longer to meet full system/performance requirement. This builds up over time and leads to increased rework in the future.

6.2 Acronyms

6.2.1 **CDR** - Critical Design Review

6.2.2 **CI** - Critical Items

6.2.3 **COTS** - Commercial Off the Shelf

6.2.4 **CRAD** - Contract Research and Development

6.2.5 **DFMEA** - Design Failure Mode and Effects Analysis

6.2.6 **DOA** - Delegation of Authority

6.2.7 **DPLC** - Digital Product Lifecycle

6.2.8 **DTC** - Design to Cost

6.2.9 **DTUPC** - Design to Unit Production Cost

6.2.10 **eBOM** - engineering Bill of Material

6.2.11 **GOTS** - Government Off the Shelf

6.2.12 **IP** - Intellectual Property

6.2.13 **IR** - Independent Review

6.2.14 **IRAD** - Independent Research and Development

6.2.15 **IV&V** - Integration, Verification, and Validation

6.2.16 **KC** - Key Characteristics

6.2.17 **KPI** - Key Performance Indicator

6.2.18 **M&S** - Model and Simulation

6.2.19 **mBOM** - manufacturing Bill of Material

6.2.20 **MBSE** - Model-based System Enterprise

6.2.21 **MRL** - Manufacturing Readiness Level

6.2.22 **MR&O** - Maintenance, Repair and Overhaul

6.2.23 **PDR** - Preliminary Design Review

6.2.24 **PMT** - Program Management Team

6.2.25 **RAR** - Requirements and Architecture Review

6.2.26 **RASI** - Responsible, Accountable, Support, Informed

6.2.27 **RLPM** - RTX Lifecycle Program Management

6.2.28 **TRL** - Technology Readiness Level

6.2.29 **TRR** - Test Readiness Review

6.2.30 **UPC** - Unit Production Cost

6.2.31 **V&V** - Verification and Validation

6.2.32 **VCRM** - Verification Cross Reference Matrix

7 Exhibits

7.1 Exhibit A - Responsibility Assignment Matrix (RASI)

7.1.1 Based on roles and responsibilities assigned within the Business, the responsible stakeholder may vary from the RASI matrix.

Stakeholders (Role) / Phase or Key Deliverables	Program Manager	Strategy	Business Development/Capture	Engineering	Operations	Supply Chain	Aftermarket/Customer Support	Quality Assurance	Legal/Contracts/Compliance	Finance	Other functional representatives, as required
Development Phase	A	S	S	**R**	S	S	S	S	S	S	S
Key Processes											
Technical Project Management and Control	A	I	I	**R**	S	S	S	S	S	S	S
Requirements and Architecture Development	A	I	I	**R**	S	S	S	S	S	S	S/I
Preliminary and Detailed Design	A	I	I	**R**	S	S	S	S	S	S	S/I
Implementation and Integration	A	I	I	**R**	S	S	S	S	S	S	S/I
Verification and Validation	A	I	I	**R**	S	S	S	S	S	S	S/I
Manufacturing/Production	A	I	I	S	**R**	S	S	S	S	S	S/I
Supplier Selection Readiness Management	A	I	I	S	S	**R**	S	S	S	S	S/I
Key Deliverables											
Technical Project Management and Control	A	I	I	**R**	S	S	S	S	S	S	S
Design Documentation	A	I	I	**R**	S	S	S	S	S	S	S/I
Product with expected TRL Achieved	A	I	I	**R**	S	S	S	S	I	I	S/I
Manufacturing Process with expected MRL Achieved	A	I	I	S	**R**	S	I	S	I	I	S/I
System Requirement Sell-Off, Certification and/or Qualification Achieved	A	I	I	**R**	S	S	I	S	I	I	S/I
Updated Risk & Opportunity Management Plan/Register For Production and Support	A	I	I	S	**R**	S	S	S	S	S	S/I
Updated staffing/resource plan heading into production and support	A	I	I	S	**R**	S	S	S	S	S	S
Capital Plan and Facility/Infrastructure Ready to Support Production & Sustainment	A	I	I	S	**R**	S	S	S	I	I	S/I
Updated Sourcing Strategy to Support Production	A	I	I	S	S	**R**	S	S	I	I	S/I
All Intellectual Property (IP) developed on the program documented through legal and/or assessed for patent infringement	A	I	I	S	I	I	I	I	**R**	I	S/I
Post-production Customer Support Strategy (e.g. Manuals, Repair Strategy, Training)	A	I	I	**R**	S	S	S	S	I	I	S/I

Legend

a. Responsible (R): Obligation to complete the deliverable or task

b. Accountable (A): Has final decision-making authority and accountability for completion of the deliverable or task

c. Support (S): Provides the support, assistance, and consultation for those responsible for the deliverable or task

d. Informed (I): Informed after a decision or action

7.2 Links to reference material

7.2.1 GCP-59 RTX Lifecycle Program Management

7.2.2 FSW-TGE-0 Governance of Technology & Global Engineering Documents

7.2.3 FSW-TGE-RLPM-01 RLPM Pursuit-to-Startup

7.2.4 FSW-OPSC-RLPM-03 RLPM Production

7.2.5 FSW-TGE-RLPM-04 RLPM Sustainment

8 Change Management

8.1 Communication, awareness and access to the FSW are key to success.

8.1.1 Communicate and train employees to perform tasks as defined in the FSW

8.1.2 Post the FSW in a location accessible by all impacted persons (examples include SharePoint Online, Teams, and ePolicy)

8.1.3 Periodically review and update the document to incorporate improvements.